



# TimberTech2 Silver

## Underlay

High density natural rubber, with **fleece backing** and **vapour barrier**

- Flooring stays put**  
 The high density, fleece-backed natural rubber is extremely stable and prevents movement in your flooring, greatly reducing wear and tear!
- Shhh! Underlay at work**  
 TimberTech2 Silver is excellent at absorbing both impact and in-room noise, to really cut down noise levels in any room.
- Protects against damp**  
 Don't worry about moisture rising up from the sub-floor – the silver vapour barrier film protects your floor covering and keeps your floor dry.

### Technical Data

Properties	Unit	Value	Method
Density	kg/m <sup>3</sup>	950 ± 50	internal
Weight per square metre	kg/m <sup>2</sup>	2.0 ± 0.20	internal
Impact Sound Reduction	dB	≥ 20	BS EN ISO 717-2
Thermal Resistance	Tog	0.3	BS 4745:2005
Maximum Compression Load	kN/m <sup>2</sup>	2-5	DIN EN 1606
Flammability	Pass		Hot Metal Nut Test
	Low radius of effect		

### QA Flooring Solutions Ltd

Unit 2 Hurricane Drive

Liverpool, L24 8RL

Tel: 0151 495 3434

Fax: 0151 420 9062

Email: sales@qaflooringsolutions.com

www.qaflooringsolutions.com

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


**Simply Better**

Heavy  
Traffic

Wood



### Best for

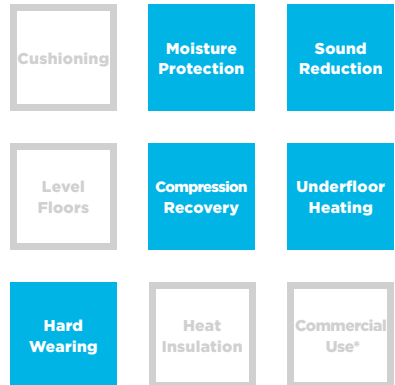

\*Suitable for hotels and public buildings

### Available in

**Code** QAU-TTS-01

**Size** 1m x 10m (10m<sup>2</sup>)

**Thickness** 2mm