



# WorkPro Tack

## Underlay

Hardwearing  
crosslinked  
polyolefin  
foam with  
**adhesive  
coating  
for faster  
fitting**

### ■ Fit it fast!

Covered by a peelable protective film, the strong adhesive on one side of WorkPro Tack means fitting's much easier than traditional nailing and gluing – so it's installed in double-quick time!

### ■ Stays in shape longer

With all the compression-resisting benefits of physically crosslinked polyolefin foam, WorkPro Tack is not only extremely durable but always makes sure your floor's fully supported, however heavy the load.

### ■ Quiet please...

WorkPro Tack also has excellent sound reduction of 20dB – you'd be amazed what a difference that can make with wooden and laminate floors, keeping noise levels more comfortable in any room.

### Technical Data

Properties	Unit	Value	Method
Density	kg/m <sup>3</sup>	30 ± 3.0	internal
Drum Sound	-	A	internal
Impact Sound Reduction	dB	≥ 20	DIN 4108
Temperature Stability (unloaded)	°C	75	internal
Thermal Conductivity of PE Foam measured at 10°C	W/m k	0.036	DIN 4108
Thermal Resistance of PE Foam	m <sup>2</sup> k/W	0.084	DIN 4108
Maximum Compression Load	kN/m <sup>2</sup>	≤ 2.0	DIN EN 1606
Resistance to Compression at 25% Deformation	to/m <sup>2</sup>	≥ 3.7	DIN 53 577
Tensile Strength, lengthwise*	N/mm <sup>2</sup>	≥ 0.41	DIN 53 571
Tensile Strength, crosswise*	N/mm <sup>2</sup>	≥ 0.29	DIN 53 571
Elongation at break, lengthwise*	%	≥ 162	DIN 53 571
Elongation at break, crosswise*	%	≥ 137	DIN 53 571

Please note:

Not suitable for pre-stretching or tautening during the laying process, and make sure you don't stretch the material in any direction while removing the release film and exposing the adhesive surface. Any stretching of the underlay will damage the foam substrate.

### QA Flooring Solutions Ltd

Block H, Pickerings Road,  
Widnes, Cheshire WA8 8XW

Tel: 0151 495 3434

Fax: 0151 420 9062

Email: [sales@qaflooringsolutions.com](mailto:sales@qaflooringsolutions.com)


[www.qaflooringsolutions.com](http://www.qaflooringsolutions.com)

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.

**Simply Better**

Heavy  
Traffic

Wood

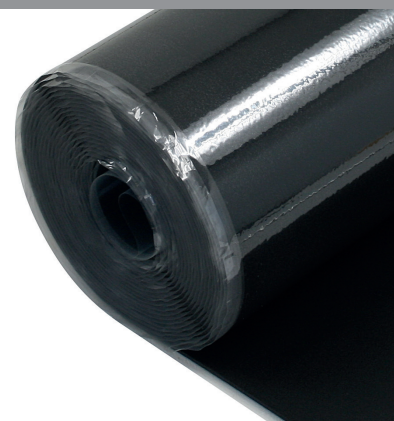

### Best for

Cushioning

Moisture  
Protection

Sound  
Reduction

Level  
Floors

Compression  
Recovery

Underfloor  
Heating

Hard  
Wearing

Heat  
Insulation

Commercial  
Use\*

\*Suitable for hotels and public buildings

### Available in

Code QAU-WPT-01

Size 1m x 10m (10m<sup>2</sup>)

Thickness 3mm