

Pure

Super High Density Underlay

Pure - Super High Density Underlay

Only the purest, highest-grade foam is used in the production of the Pure range for the most sumptuous feel under the carpet.

Technical Data

Properties	Unit / Value / Method	
	Pure SHD 9mm	Pure SHD 11mm
Rating / Classification	Heavy / Luxury Use	Heavy / Luxury Use
Density	100kg/m ³ ± 5%	100kg/m ³ ± 5%
Thickness	9mm ± 5%	11mm ± 5%
Roll Dimensions	1.37m x 11m (15.07m ²)	1.37m x 11m (15.07m ²)
Roll Weight	14.5kg ± 5%	17.0kg ± 5%
Tog Rating	2.43 BS 4745:2005	3.04 BS 4745:2005
Impact Sound Reduction	Approx. 38dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010	Approx. 44dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010
Flammability (hot metal nut test)	Pass - Medium radius of effect BS 4790:1987 (2009)	Pass - Medium radius of effect BS 4790:1987 (2009)
Guarantee	Lifetime to carpet	Lifetime to carpet

QA Flooring Solutions Ltd

Unit 2 Hurricane Drive

Liverpool, L24 8RL

Tel: 0151 495 3434

Fax: 0151 427 0484

Email: sales@qaflooringsolutions.com

www.qaflooringsolutions.com

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


Simply Better

Heavy
Traffic

Carpet



Best for

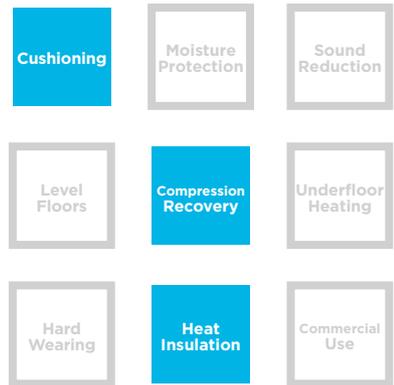

*Suitable for hotels and public buildings

Available in

Code	QAU-PUR-03
Size	1.37m x 11m
Thickness	9mm
Code	QAU-PUR-04
Size	1.37m x 11m
Thickness	11mm