


Technical Data Sheet

Decorative Acoustic Wall Panels



Acoustic Backing Layer:	PET fibre board with up to 60% recycled content (recycled PET bottles), 9mm thickness
Wooden Slats:	Black coloured MDF with real wood veneer or decorative foil on front face, 25mm x 10mm. Spacing between Slats: 15mm
Panel Size:	2400mm (L) x 573mm (W) x 19mm +/- 2% (D)
Weight:	Approx. 7kg per panel
Fire Resistance:	Class E acc. to EN 13501-1
Noise Absorption:	According to ISO 11654 Weighted Noise Absorption Coefficient (α_w) = 0.25 when installed directly to a solid wall Reduces noise by up to 25%

Frequency f (Hz)	Octave α_p
100 125 160	0.05
200 250 315	0.20
400 500 630	0.50
800 1000 1250	0.05
1600 2000 2500	0.85
3150 4000 5000	0.75

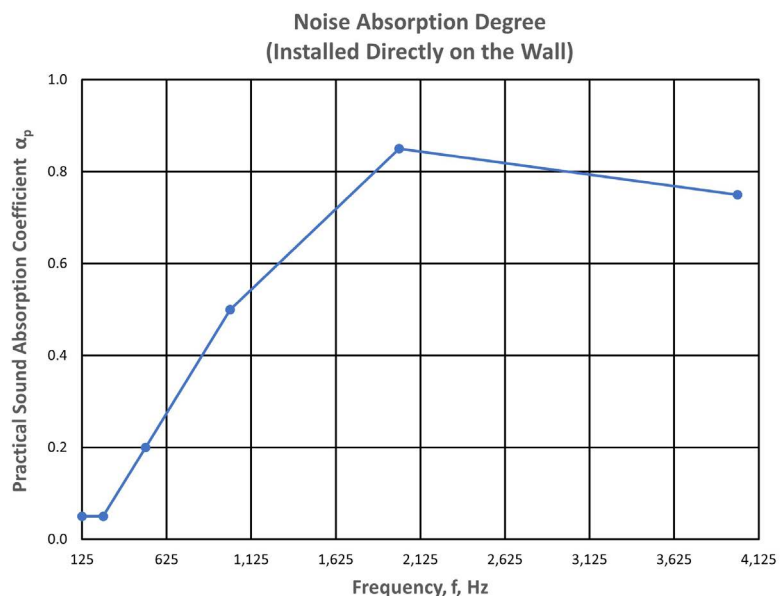

Care and Maintenance

Use a duster and/or vacuum cleaner to remove dust. Use a dry cloth to wipe panels down. Do not use water or household detergents as these may damage the decorative face of the panels.

Decorative Acoustic Wall Panels from QA

2 Hurricane Court, Speke, Liverpool L24 8RL
Tel: 0151 495 3434 Email: sales@qaflooringsolutions.com

