



TimberTech2 Acoustic Plus

Underlay

Heavyweight natural rubber underlay with **outstanding noise reduction.**

- The sound of silence...**
 TimberTech2 Acoustic Plus has an exceptional impact sound insulation level of 27dB - really bringing down noise levels in the room and making it a better place to be.
- Protects against moisture**
 The gold vapour barrier stops your floor covering being damaged by moisture rising up from the sub-floor.
- Heavyweight champ**
 The heavy mass stability of TimberTech2 Acoustic Plus means your floor's always fully supported, reducing the wear and tear to it, whatever a pounding it takes!

Technical Data

Properties	Unit	Value	Method
Density	kg/m ³	750 ± 50	internal
Weight per square metre	kg/m ²	3.7 ± 0.37	internal
Impact Sound Reduction	dB	≥ 27	BS EN ISO 717-2:2013
Thermal Conductivity measured at 10°C	W/m k	0.036	DIN 4108
Thermal Resistance	Tog	0.66	BS4745:2005 (ISO 5085-1:1989)
Maximum Compression Load	kN/m ²	2-5	DIN EN 1606
Flammability	Pass		Hot Metal Nut Test
	Low radius of effect		

QA Flooring Solutions Ltd

Unit 2 Hurricane Drive

Liverpool L24 8RL

Tel: 0151 495 3434

Fax: 0151 427 0484

Email: sales@qaflooringsolutions.com

www.qaflooringsolutions.com

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


Simply Better

Heavy Traffic

Wood



Best for

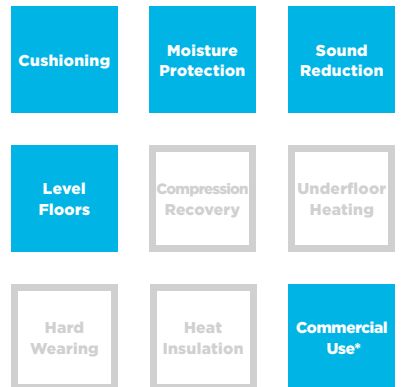

*Suitable for hotels and public buildings

Available in

Code QAU-TTA-02

Size 1m x 8m (8m²)

Thickness 5mm