



E-Board Timber

Professional Systems

High performance acoustic underlay system for timber subfloors

■ Quiet please...

A layer of Class O Acoustic Foam sandwiched between Acoustic Barrier means excellent impact (53dB) and airborne sound (49dB) insulation - ideal for new, retrofit or renovation projects in offices, homes and hotels.

■ Relax - it's fire-resistant

The Class O Acoustic Foam is also fully tested to meet BS476: parts 6 & 7 for fire resistance, adding peace of mind to peace and quiet.

■ Meet the regs

Whether it's used in commercial or residential installations, you can rely on E-Board Timber to fully comply with Doc E of the Building Regulations.

Technical Data

Properties	Unit	Value	Method
Airborne Sound Reduction	dB	49	BSEN ISO-140-8
Impact Sound Reduction	dB	53	BSEN ISO-140-8

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


QA Flooring Solutions Ltd

Block H, Pickerings Road,
Widnes, Cheshire WA8 8XW
Tel: 0151 495 3434
Fax: 0151 420 9062
Email: sales@qaflooringsolutions.com
www.qaflooringsolutions.com


Simply Better

Heavy Traffic

All Floor Finishes

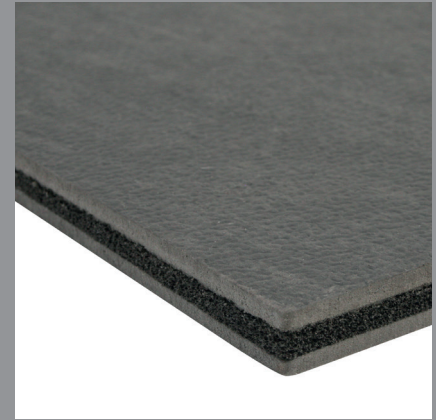

Best for

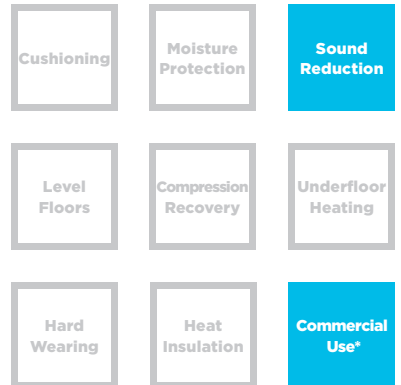

*Suitable for hotels and public buildings

Available in

Code	QAU-EBT-01
Size	1.2m x 1m (1.2m ²)
Thickness	12mm