



# Pure

## Ultra High Density Underlay

### Pure - Ultra High Density Underlay

Only the purest, highest-grade foam is used in the production of the Pure range for the most sumptuous feel under the carpet.

#### Technical Data

Properties	Unit / Value / Method	
	Pure UHD 9mm	Pure UHD 11mm
<b>Rating / Classification</b>	Heavy / Luxury Use	Heavy / Luxury Use
<b>Density</b>	145kg/m <sup>3</sup> ± 5%	145kg/m <sup>3</sup> ± 5%
<b>Thickness</b>	9mm ± 5%	11mm ± 5%
<b>Roll Dimensions</b>	1.37m x 11m (15.07m <sup>2</sup> )	1.37m x 11m (15.07m <sup>2</sup> )
<b>Roll Weight</b>	19.7kg ± 5%	24.0kg ± 5%
<b>Tog Rating</b>	2.44 BS 4745:2005	2.81 BS 4745:2005
<b>Impact Sound Reduction</b>	Approx. 38dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010	Approx. 44dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010
<b>Flammability (hot metal nut test)</b>	Pass - Medium radius of effect BS 4790:1987 (2009)	Pass - Medium radius of effect BS 4790:1987 (2009)
<b>Guarantee</b>	Lifetime to carpet	Lifetime to carpet

#### QA Flooring Solutions Ltd

Unit 2 Hurricane Drive  
 Liverpool, L24 8RL  
 Tel: 0151 495 3434  
 Fax: 0151 427 0484  
 Email: sales@qaflooringsolutions.com  
 www.qaflooringsolutions.com

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


Simply Better

Heavy  
Traffic

Carpet



#### Best for

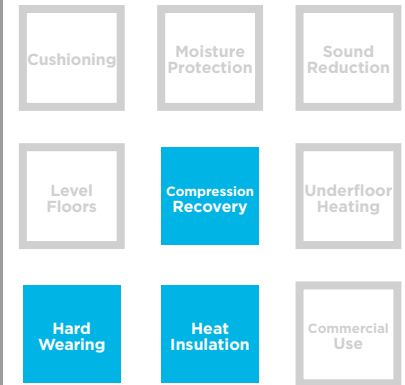

\*Suitable for hotels and public buildings

#### Available in

<b>Code</b>	<b>QAU-PUR-05</b>
<b>Size</b>	1.37m x 11m
<b>Thickness</b>	9mm
<b>Code</b>	<b>QAU-PUR-06</b>
<b>Size</b>	1.37m x 11m
<b>Thickness</b>	11mm